


- Timber
- Aluminium
- Concrete

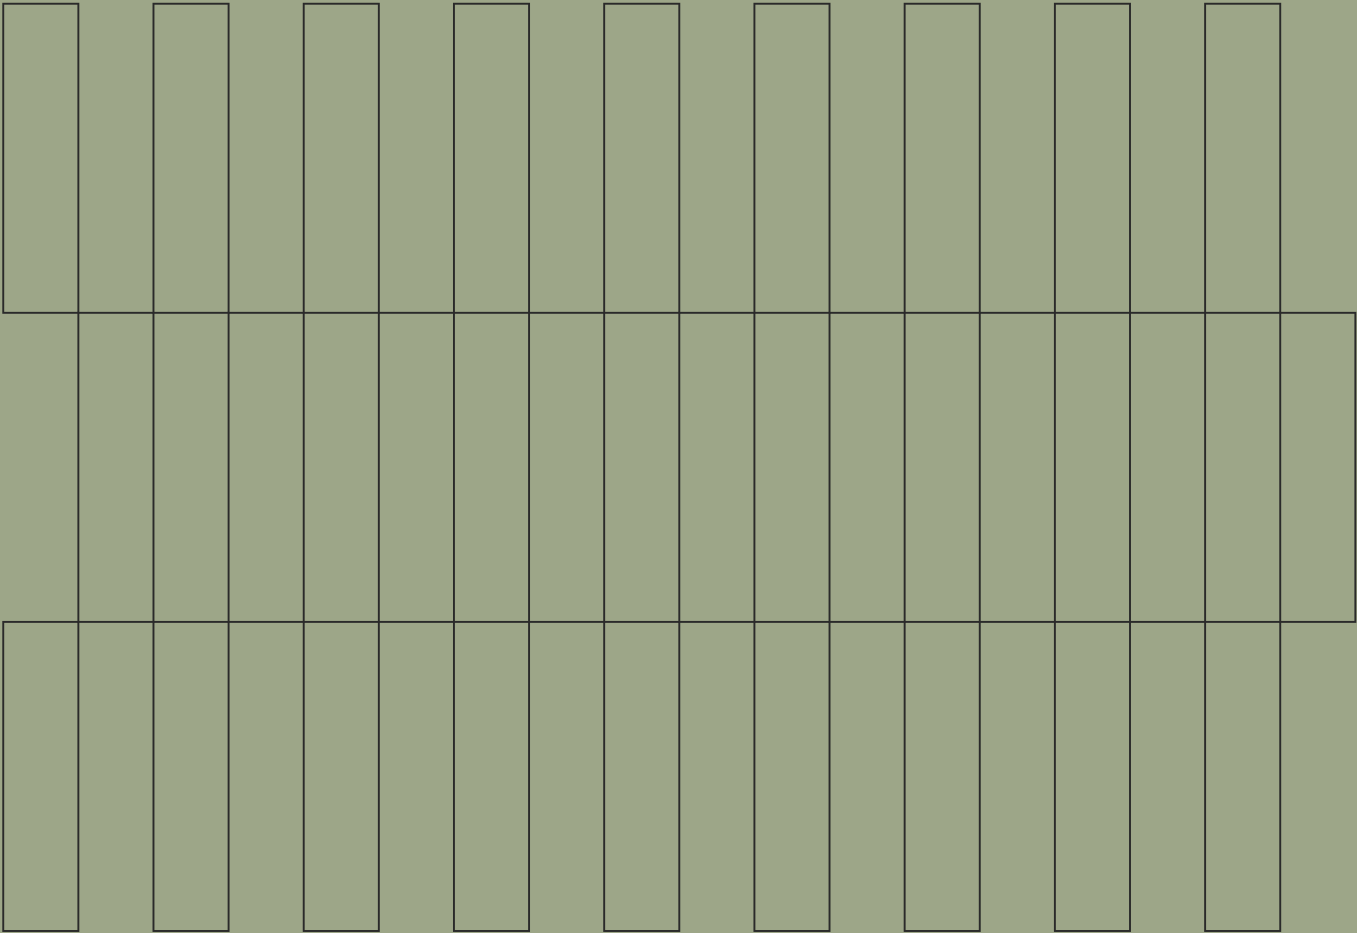

Austratus Acoustic Information

Austratus Sound Absorption Insulation

Product Information



- Thermally bonded polyester fibre insulation designed to provide high performance sound absorption across a range of frequencies
- Available in a range of thickness and densities
- Fibre blends engineered to provide maximum acoustic and thermal performance in diverse industrial, community, residential and commercial applications
- Non-irritant; protective clothing and masks not required for installation
- Standard white colour; also available in black and grey upon request

Acoustin Performance

Tested in accordance with AS/ISO 354 - 2006

XHD 25 & XHD 50

Frequencies	125hz	250hz	500hz	1000hz	2000hz	4000hz	Alpha W	NRC
XHD 25	0.15	0.35	0.6	0.8	0.85	0.95	0.7	0.7
XHD 50	0.19	0.62	1.01	1.02	0.98	0.96	0.9	0.9

