

—Timber
—Aluminium
—Concrete

Modinex

Crafting architectural signatures that tell a story.



Product Collection

Architectural materials with intention

We work with architects, designers, and builders to shape spaces that feel grounded, refined, and enduring.

Our collection spans timber, aluminium and cement-bonded materials, selected for their performance, expression, and design flexibility.

Every project begins with an idea. Our role is to help translate that idea into a built outcome that honours the design intent.

This happens through considered material selection, clear technical support, and attentive collaboration throughout the project.

We bring more than 40 years of local manufacturing knowledge, supported by a national team.

The result is material solutions that are practical to specify, efficient to install and consistent in appearance and performance.

Modinex exists to help create work that lasts.



Sustainability and manufacturing ethos

Responsible by design

Sustainable practice is foundational to our work. We prioritise responsibly sourced materials, efficient manufacturing processes, and long-term product durability.

— Timber is sourced from sustainably managed forests and is available with PEFC or FSC certification.

— Aluminium is available in Green and SuperGreen grades, reducing embodied carbon by up to 75%.

— Fibre cement products are silica-free and utilise recycled timber content.

— Our Long Plank manufacturing process maximises yield and reduces on-site waste.

— Our timber production facilities operate to a zero-waste model, with byproduct streams repurposed for reuse.

We evaluate the environmental impact of materials across their life cycle to support responsible specification, longevity, and maintenance.

Good materials should age well, perform reliably, and minimise what is taken from the environment.

Using this catalogue

This catalogue is organised to follow the progression of our material collections.

- 1. Begin with material selection
 - Aluminium Collection
 - Timber Collection
 - Cement Bonded Particle Board Collection
 - Engineered Timber Flooring
 - Decking

2. Explore profiles and systems

Each section introduces the available profiles, design and specification information, and suitable applications.

3. Review finishes and specification details

Timber species, coatings, finishes, and product weights are consolidated at the end of each product collection.

If you require samples, technical drawings or assistance with specification, our projects team is available to support you.

hello@modinex.com.au
1800 156 455



Table of Contents

Aluminium Collection

- 4 Austratus Linear – Aluminium
- 5 Austratus Linear (Direct Fix) – Aluminium
- 6 Austratus Grid – Aluminium
- 8 Alu Batten
- 10 Alu Selekt Channel
- 11 Alu Selekt Castelation
- 12 Aluminium Timber Grain Finishes
- 13 Profiles & Product Weights

Timber Collection

- 14 Austratus Linear – Timber
- 16 Austratus Linear (Direct Fix) – Timber
- 18 Austratus Grid - Timber
- 20 Austratus Vertical - Timber
- 22 Beachclad
- 23 Elements Channel Cladding
- 24 Newport Channel Cladding
- 25 Newport Channel Charred
- 26 Nautic Cladding
- 27 Stepped Expression
- 28 Shiplap
- 29 Vee-joint
- 30 Channel Cladding
- 32 Hemline
- 34 Castelation
- 35 Screenclad
- 36 Castelation & Screenclad Two Tone

Timber Collection

- 37 Screening & Battens
- 38 Diamond Clad
- 39 Rounds
- 40 Flute & Concave
- 41 Convex
- 42 Shingles
- 43 Weatherboard
- 44 Timber Finishes
- 46 Timber Coatings
- 47 Profiles & Product Weights

Cement Bonded Particle Board Collection

- 54 Viroc Wall Panelling
- 55 Viroc Flooring

Engineered Timber Flooring Collection

- 56 Frech Oak Flooring
- 58 Australian Hardwood Flooring
- 59 Stair Nosings

Decking Collection

- 60 Millboard Decking
- 61 Tractio Decking






Austratus Linear – Aluminium

Architectural charm, modular versatility, and fast concealed installation with our patented clip system
Application suitability varies by species selection

Profiles

30mm Fin series
40mm, 60mm and 90mm depth available



Flat series
90mm wide available



Dowel series
40mm width available



Design and Performance

- Acoustic — Up to 0.9 NCR acoustic rated insulation available
- Fire rating — Up to BAL 29 or Group 3 fire-rated timber species available (Group 1 if Fireshield coating is applied) and aluminium profiles are AS1530.1 non-combustible or Group 1 fire rated
- Sustainability — Profiles are available in a large range of sustainable timber species or in aluminium (Green or Super Green to reduce CO2 emission by 50-75%)
- Pre-finished — Available in a range of standard or custom pre-finished stains, colours and powder coat finishes
- Application — Suitable for out of weather or external use

Finishes and Colours

See page 12 for full finish range.




Austratus Linear (Direct Fix) – Aluminium

Simplistic Creativity
Suitable for external and out-of-weather applications.

Profiles

30mm Fin series
40mm, 60mm and 90mm depth available



Flat series
90mm wide available



Dowel series
40mm width available



Design and Performance

- Acoustic — Up to 0.9NCR acoustic rated insulation available
- Fire rating — Up to BAL 29 or Group 3 fire-rated timber species available (Group 1 if Fireshield coating is applied) and aluminium profiles are AS1530.1 non-combustible or Group 1 fire rated
- Sustainability — Profiles are available in a large range of sustainable timber species or in aluminium (Green or Super Green to reduce CO2 emission by 50-75%)
- Pre-finished — Available in a range of standard or custom pre-finished stains, colours and powder coat finishes
- Application — Suitable for out of weather or external use

Finishes and Colours

See page 12 for full finish range.




Austratus Grid – Aluminium

Our patented clip-in system for suspended grid ceiling installation
Suitable for internal applications.

Profiles

30mm Fin series
40mm, 60mm and 90mm depth available



Design and Performance

Design — Suspended grid ceiling solution, designed for quick and ease of installation

Fire rating — Up to BAL 29 or Group 3 fire-rated timber species available (Group 1 if Fireshield coating is applied) and aluminium profiles are AS1530.1 non-combustible or Group 1 fire rated

Sustainability — Available in Green & Supergreen aluminium to reduce CO2 emission by 50-75% or a large range of sustainable timber species

Pre-finished coatings — Available in a range of standard colours

Application — Suitable for internal and out of weather applications only

Grid size — Softwood species are suitable for a grid size of up to 1m x 1m. However, Hardwood species are only suitable for up to 0.6m x 0.6m and a max batten depth of 140mm

Finishes and Colours

See page 12 for full finish range.




Alu Batten

Architectural aluminium batten system
Suitable for external and out-of-weather applications.

Profiles


25mm series
25mm, 50mm, 75mm and 100mm depth available



40mm series
40mm depth available



50mm series
25mm, 50mm, 100mm, 150mm and 200mm depth available

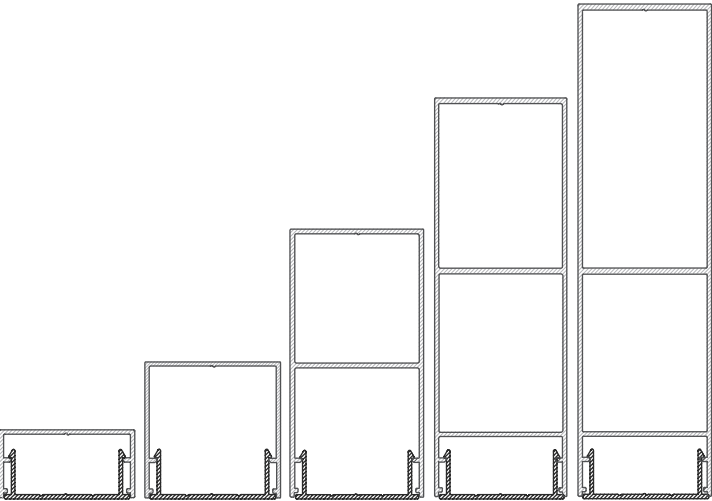

Design and Performance

Compliance – Sea salt spray certified

Fire rating – AS1530.1 non-combustible

Durability – 15-year colour retention warranty for timber grain, 25-year colour retention warranty for solid colour, 25-year film integrity warranty

Availability – 100% Australian-made with short lead times

Sustainability – Available in Green and SuperGreen aluminium with up to 75% lower CO₂ emissions

Design flexibility – Offered in plain colours or realistic timber grain finishes

Accessories – Range of aluminium or PVC end caps available



Finishes and Colours

See page 12 for full finish range.


Alu Seleкта Channel

Architectural aluminium batten system
Suitable for external and out-of-weather applications.

Profiles



75mm wide
18mm thickness available



155mm wide
18mm thickness available

Design and Performance

Compliance – CodeMark certified, cyclone rated and sea salt spray tested

Fire rating – AS1530.1 non-combustible

Durability – 15-year colour retention warranty for timber grain, 25-year colour retention warranty for solid colour, 25-year film integrity warranty

Availability – 100% Australian-made with short lead times

Installation – Concealed fixings for a clean, refined finish

Profile design – Interlocking tongue system allows for seamless appearance and easy alignment

Sustainability – Available in Green and SuperGreen aluminium with up to 75% lower CO₂ emissions

Finish options – Available in plain colours and realistic timber grain finishes

Curved application – 75mm profile can curve to 700mm radius, 155mm to 1200mm

Finishes and Colours

See page 12 for full finish range.




Alu Seleкта Castelation

Architectural aluminium castellated cladding system
Suitable for external and out-of-weather applications.

Profiles



40mm wide
20mm thickness available



160mm wide
20mm thickness available

Design and Performance

Compliance – CodeMark certified, cyclone rated and sea salt spray tested

Fire rating – AS1530.1 non-combustible

Durability – 15-year colour retention warranty for timber grain, 25-year colour retention warranty for solid colour, 25-year film integrity warranty

Availability – 100% Australian-made with short lead times

Installation – Concealed fixings for a clean, streamlined appearance

Seamless profile – Interlocking tongue system allows for easy alignment and secret fixing

Sustainability – Available in Green and SuperGreen aluminium with up to 75% lower CO₂ emissions

Design flexibility – Offered in a wide range of plain and timber-look finishes

Curved application – 40 x 20mm profiles suit a convex radius of 300mm or greater

Finishes and Colours

See page 12 for full finish range.




Timber Grain Aluminium Finishes

— MXDURA


Our MX Dura finish uses a next-generation powder on powder system to create a lifelike 3D timber grain appearance with outstanding depth and realism, and no repeat patterns. This finish includes a 15-year colour retention warranty and a 25-year film integrity warranty.




Everest




Light Oak




Tasmanian Oak




Blackbutt



Cedar



White Oak




Spotted Gum




Dark Cedar



American Oak



Brushbox



Meranti



English Oak



Brown Oak



Dark Smoked Oak




Silvertop Ash




White Birch



Silver Oak



African Ebony



Midnight Carbon

Solid colour options from Interpon and Dulux are also available. Contact our team for full powder coat specifications and project support.



Profiles & Product Weights

PROFILE	WEIGHT
Alu Batten 25 x 25mm	0.57 kg/lm
Alu Batten 25 x 50mm	0.78 kg/lm
Alu Batten 40 x 40mm	0.83 kg/lm
Alu Batten 50 x 25mm	0.84 kg/lm
Alu Batten 50 x 50mm	1.06 kg/lm
Alu Seleкта Channel 75 x 18mm	9.70 kg/m2
Alu Seleкта Channel 155 x 18mm	7.47 kg/m2
Alu Seleкта Castelation 40 x 20mm	17.10 kg/m2
Alu Seleкта Castelation 160 x 20mm	11.11 kg/m2
Alu Seleкта Castelation Ultra 160 x 20mm	8.49 kg/m2



Austratus Linear - Timber

Architectural charm, modular versatility, and fast concealed installation with our patented clip system.
Application suitability varies by species selection

Profiles

30mm Fin series


30mm, 40mm, 60mm, 90mm, 140mm and 190mm depth available



30mm V Fin
60mm depth available




Dome series
40mm, 60mm and 90mm depth available



Flat series

29mm, 40mm, 60mm and 90mm wide available




40mm Fin series

40mm, 60mm, 90mm, 140mm and 190mm depth available




42mm Peak series
40mm, 60mm and 90mm wide available




Dowel series

32mm, 40mm and 60mm width available



30mm Concave
60mm wide available



Design and Performance

Acoustic — Up to 0.9 NCR acoustic rated insulation available

Fire rating — Up to BAL 29 or Group 3 fire-rated timber species available (Group 1 if Fireshield coating is applied) and aluminium profiles are AS1530.1 non-combustible or Group 1 fire rated

Sustainability — Profiles are available in a large range of sustainable timber species or in aluminium (Green or Super Green to reduce CO2 emission by 50-75%)

Pre-finished — Available in a range of standard or custom pre-finished stains, colours and powder coat finishes

Application — Suitable for out of weather or external use



Materials and Colours

— Timber species listed on page 46. Hardwood species are only suitable for profiles up to 140mm of depth

— Timber coatings listed on page 47

Austratus Linear (Direct Fix) - Timber

Simplistic creativity

Profiles

30mm Fin series


30mm, 40mm, 60mm, 90mm, 140mm and 190mm depth available



30mm V Fin
60mm depth available




Dome series
40mm, 60mm and 90mm depth available



Flat series

29mm, 40mm, 60mm and 90mm wide available




40mm Fin series


40mm, 60mm, 90mm, 140mm and 190mm depth available



42mm Peak series
40mm, 60mm and 90mm wide available




30mm Concave
60mm wide available



Dowel series

32mm, 40mm and 60mm width available



Design and Performance

Acoustic — Up to 0.9NCR acoustic rated insulation available

Fire rating — Up to BAL 29 or Group 3 fire-rated timber species available (Group 1 if Fireshield coating is applied) and aluminium profiles are AS1530.1 non-combustible or Group 1 fire rated

Sustainability — Profiles are available in a large range of sustainable timber species or in aluminium (Green or Super Green to reduce CO2 emission by 50-75%)

Pre-finished — Available in a range of standard or custom pre-finished stains, colours and powder coat finishes

Application — Suitable for out of weather or external use



Materials and Colours

— Timber species listed on page 46. Hardwood species are only suitable for profiles up to 140mm of depth

— Timber coatings listed on page 47




Austratus Grid


Our patented clip-in system for suspended grid ceiling installation (available in timber and aluminium)
Suitable for internal applications.

Profiles


30mm Fin series
40mm, 60mm, 90mm, 140mm and 190mm depth available

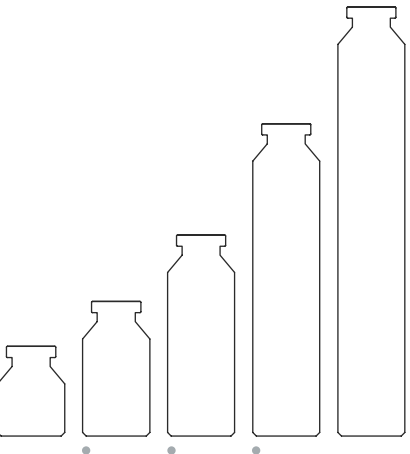


30mm Facia
65mm, 85mm, 115mm,
165mm and 215mm depth available

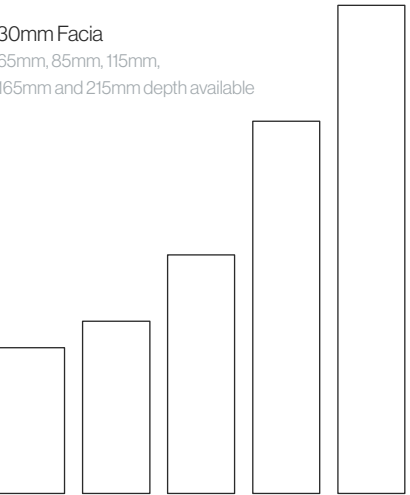

40mm Fin series
40mm, 60mm, 90mm, 140mm and 190mm depth available

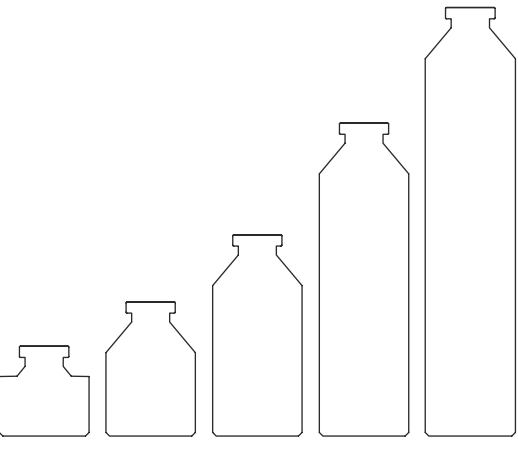

40mm Facia
65mm, 85mm, 115mm,
165mm and 215mm depth available

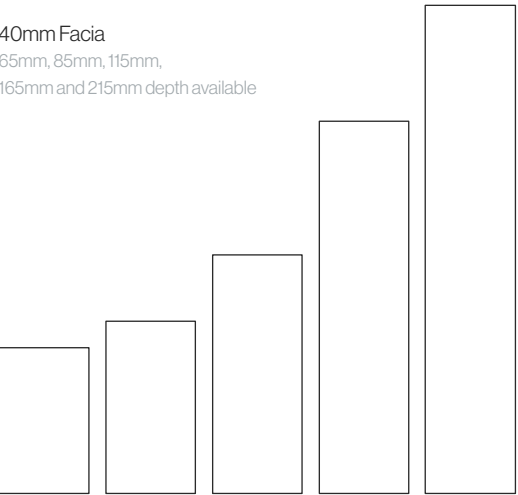

Design and Performance

Design — Suspended grid ceiling solution, designed for quick and ease of installation

Fire rating — Up to BAL 29 or Group 3 fire-rated timber species available (Group 1 if Fireshield coating is applied) and aluminium profiles are AS1530.1 non-combustible or Group 1 fire rated

Sustainability — Available in Green & Supergreen aluminium to reduce CO2 emission by 50-75% or a large range of sustainable timber species

Pre-finished coatings — Available in a range of standard colours

Application — Suitable for internal and out of weather applications only

Grid size — Softwood species are suitable for a grid size of up to 1m x 1m. However, Hardwood species are only suitable for up to 0.6m x 0.6m and a max batten depth of 140mm



Materials and Colours

— Timber species listed on page 46. Hardwood species are only suitable for profiles up to 140mm of depth

— Timber coatings listed on page 47





Austratus Vertical

Our patented clip-in system for suspended vertical ceiling design (available in timber only)
Suitable for internal applications.

Profiles

40mm Square
Any custom lengths available from 500mm to 1000mm long.
Available with square or 10mm radius corners



Features and Benefits

- Design — Suspended vertical ceiling solution, designed for quick and ease of installation
- Fire rating — Group 3 (Group 1 if Fireshield is applied) internally
- Sustainability — Large range of 100% plantation PEFC certified softwood species available
- Timber species — Only available in Western Red Cedar, Alaskan Cedar, and Hemlock timber species
- Pre-finished coatings — Available in a range of standard colours
- Application — Suitable for internal and out of weather applications only

Materials and Colours

- Timber species listed on page 46
- Timber coatings listed on page 47





Beachclad

Band sawn timber cladding with a natural, textured finish
Suitable for external and out-of-weather applications.

Profiles

120mm wide
18mm thickness available

40mm wide
40mm thickness available

170mm wide
18mm thickness available

81mm wide
21mm and 25mm thickness available

40mm wide
60mm thickness available

115mm wide
26mm thickness available

Design and Performance

Sustainable timber – 100% PEFC Certified, sustainably harvested and chemical-free

Species – Available in Western Red Cedar Select Tight Knot

Profiles – Offered in popular channel profiles

Finish – Pre-finished in a standard range of architectural colours

Application – Suitable for external use in out-of-weather zones

Lengths – Supplied in random or set lengths

Colours



*Custom colours available on request



Elements Channel Cladding

Timber cladding with refined shadowline profile
Suitable for external and out-of-weather applications.

Profiles

120mm wide
20mm thickness available

40mm wide
40mm thickness available

40mm wide
60mm thickness available

Design and Performance

Sustainable timber – 100% PEFC Certified, sustainably harvested and chemical-free

Species – Available in Thermally Modified Hemlock


Profiles – Offered in popular channel profiles

Finish – Pre-finished in a standard range of architectural colours

Application – Suitable for external use in out-of-weather zones

Lengths – Supplied in random or set lengths

Colours

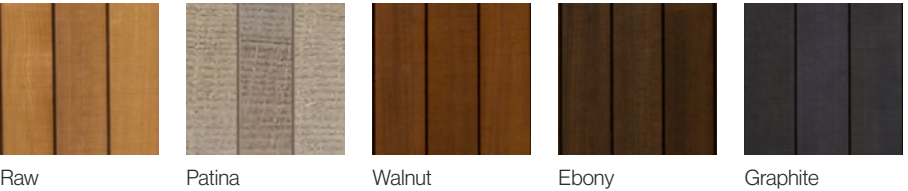


*Custom colours available on request



Newport Channel Cladding

Crafted hardwood profiles that highlight natural grain and tonal variation
Suitable for external and out-of-weather applications.


Profiles



70mm wide
19mm thickness available with 5mm groove




40mm wide
40mm thickness available




70mm wide
19mm thickness available with 15mm groove



120mm wide
19mm thickness available with 5mm groove



40mm wide
60mm thickness available



120mm wide
19mm thickness available with 15mm groove



Design and Performance

Sustainable timber — Available in a range of sustainably certified hardwood timber species

Certification — FSC certified species are available

Fire rating — Group 3 (Group 1 if FireShield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Pre-finished coatings available — Available in a range of standard colours

Application — Suitable for out of weather or external use

Design — Available in random or set length options

Timber Species and Colours

— Timber species listed on page 46 (Hardwoods only)

— Timber coatings listed on page 47



Newport Channel Charred

Shou Sugi Ban in architectural-grade Australian hardwood.
Suitable for external and out-of-weather applications.


Profiles



70mm wide
19mm thickness available with 5mm groove



40mm wide
40mm thickness available




70mm wide
19mm thickness available with 15mm groove



120mm wide centre groove
19mm thickness available



115mm wide
26mm thickness available



120mm wide
19mm thickness available with 5mm groove



120mm wide
19mm thickness available with 15mm groove

*Other profiles available on request

Timber Species

— Timber species listed on page 46 (Ironbark & Spotted Gum only)



Design and Performance

Sustainable timber — Available in PEFC and FSC certified Ironbark and Spotted Gum

Fire rating — Group 3 (Group 1 if FireShield is applied) for internal use, and BAL 29 for external applications

Character — Deep, authentic charred finish delivers natural variation and surface depth

Durability — Charred on both faces for improved dimensional stability and resilience

Ease of install — Suitable for concealed or face fixings

Sealer coating — Pre-coated with our signature sealer, with optional site-applied final coat

Accessories — Matching corners and end trims available


Design — Available in random or set lengths



Nautic Cladding

A cladding solution with a softly weather aesthetic
Suitable for external and out-of-weather applications.

Profiles



70mm wide
19mm thickness available with 15mm groove



120mm wide
19mm thickness available with 15mm groove




115mm wide
26mm thickness available



81mm x 26mm profile
21mm and 26mm thickness available



40mm wide
40mm thickness available



40mm wide
60mm thickness available

Design and Performance

Sustainable timber — Available in a range of sustainably certified hardwood timber species

Certification — FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Pre-finished coatings available — Available in a range of standard colours


Application — Suitable for out of weather or external use

Design — Enhanced weathered character that is available in random or set length options


Timber Species and Colours




Raw



Charred



Mist



Smokey Grey

— Timber species listed on page 46 (Hardwoods only)

*Custom colours available on request




Stepped Expression

Linear rhythm and profile depth for bold facades
Application suitability varies by species selection


Profiles

27mm wide Step series
39mm, 67mm and 91mm
thickness available



80mm wide
26mm thickness available

17mm thickness Flat series
17mm, 54mm, 81mm, 135mm,
and 162mm wide available



40mm wide
40mm thickness available

Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Configurations — Available with a range of spacer and batten profiles

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications





Shiplap

A timeless, clean-lined profile
Application suitability varies by species selection

Profiles



82mm wide
9mm, 12mm, 15mm and 18mm thickness available



133mm wide
9mm, 12mm, 15mm and 18mm thickness available



181mm wide
18mm thickness available



Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications

Timber Species and Colours

— Timber species listed on page 46

— Timber coatings listed on page 47



Vee-joint

A minimal profile with subtle groove detail
Application suitability varies by species selection

Profiles



86mm wide
9mm, 12mm, 15mm and 18mm thickness available



133mm wide
12mm, 15mm and 18mm thickness available



136mm wide
9mm thickness available



181mm wide
18mm thickness available

Timber Species and Colours

— Timber species listed on page 46

— Timber coatings listed on page 47



Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications



Channel Cladding

Simplified profile with a shadowline finish
Application suitability varies by species selection

Profiles



86mm wide
12mm thickness available



133mm wide
12mm thickness available



70mm wide
18mm thickness available



120mm wide
18mm thickness available



170mm wide
18mm thickness available



115mm wide
26mm thickness available



Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications



Timber Species and Colours

— Timber species listed on page 46

— Timber coatings listed on page 47






Hemline

Pre-coated timber cladding in a minimalist profile
Suitable for internal and out of weather applications.

Profiles




Shiplap 82mm wide
12mm thickness available



Shiplap 133mm wide
12mm thickness available



Veejoint 86mm wide
12mm thickness available



Veejoint 133mm wide
12mm thickness available



Design and Performance

Sustainable timber — Available in Hemlock

Certification — PEFC species available

Fire rating — Group 3 for internal applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications



Colours



Shiplap Blackbutt



Shiplap Copper



Shiplap Limewash



Shiplap Natural



Shiplap Scorched Oak



Shiplap Raw




Shiplap Tasmanian Oak




Shiplap Whitewash



Veejoint Blackbutt



Veejoint Copper



Veejoint Limewash




Veejoint Natural



Veejoint Scorched Oak



Veejoint Raw



Veejoint Tasmanian Oak



Veejoint Whiteash



Castelation

A bold cladding option for expressive walls and facades
Application suitability varies by species selection

Profiles



81mm wide
12mm and 18mm thickness available



81mm wide
21mm and 26mm thickness available



Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications

Timber Species and Colours

— Timber species listed on page 46

— Timber coatings listed on page 47



Screenclad

A refined batten-style profile
Application suitability varies by species selection

Profiles



81mm wide
12mm, and 18mm thickness available



81mm wide
21mm and 26mm thickness available



120mm wide
21mm and 26mm thickness available

Timber Species and Colours

— Timber species listed on page 46

— Timber coatings listed on page 47



Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications





Castelation & Screenclad Two Tone

Sophisticated contrast and warm tonal variation
Suitable for internal and out-of-weather applications.


Profiles



Castelation 81mm wide
12mm and 18mm thickness available



Castelation 81mm wide
21mm and 26mm thickness available



Screenclad 81mm wide
12mm and 18mm thickness available



Screenclad 81mm wide
21mm and 26mm thickness available

Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length option


Pre-finished coatings available — Available in a range of standard colours

Application — Suitable for internal and out of weather applications only


Timber Species and Colours



Mocha



Sago



Double Black



Double White

— Timber species listed on page 46

*Custom RAL colours are available




Screening & Battens


Flexible screening profiles
Application suitability varies by species selection

Profiles

30mm wide series
30mm, 40mm, 67mm
and 91mm thickness available



40mm wide series
40mm, 67mm and 91mm
thickness available



Timber Species and Colours

— Timber species listed on page 46

— Timber coatings listed on page 47



Design and Performance

Sustainable timber — Available in a range of sustainably certified softwood and hardwood timber species

Application — Options available for external and out of weather applications


Design — Available in random or set length options. Also a range of surface finishes are available.



Diamond Clad

Sculptural diamond shaped cladding
Application suitability varies by species selection

Profiles



Diamond Clad Single 81mm wide
26mm thickness available



Diamond Clad 81mm wide
26mm thickness available

Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications

Timber Species and Colours

— Timber species listed on page 46

— Timber coatings listed on page 47



Rounds

Rounded cladding profiles
Application suitability varies by species selection

Profiles



Double round 81mm wide
26mm thickness available



Half Dowel 81mm wide
26mm thickness available

Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications

Timber Species and Colours

— Timber species listed on page 46

— Timber coatings listed on page 47







Flute & Concave

Sculptural diamond shaped cladding
Application suitability varies by species selection

Profiles



Flute 81mm wide
26mm thickness available



CNCV 81mm wide
26mm thickness available



RCV 81mm wide
26mm thickness available



Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications

Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications

Timber Species and Colours

— Timber species listed on page 46


— Timber coatings listed on page 47




Convex

Bold curved profiles
Application suitability varies by species selection

Profiles



RCX 81mm wide
26mm thickness available



SRIB 81mm wide
26mm thickness available



Ribclad 81mm wide
26mm thickness available

Timber Species and Colours

— Timber species listed on page 46

— Timber coatings listed on page 47



Design and Performance

Sustainable timber — Available in a range of sustainably certified timber species

Certification — PEFC and FSC certified species are available

Fire rating — Group 3 (Group 1 if Fireshield is applied) for internal applications, and up to BAL29 for external applications


Easy to install — Concealed fixings for a refined design for ease of installation

Seamless design — Specially designed interlocking tongue allows for secret fixing

Design — Available in random or set length options

Pre-finished coatings available — Available in a range of standard colours

Application — Options available for external and out of weather applications

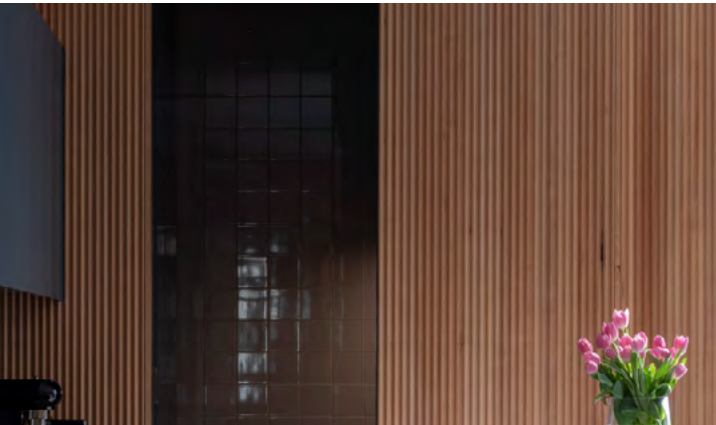


Shingles

Textural character and natural warmth
Suitable for external applications

Profiles

450mm wide
11mm thickness available

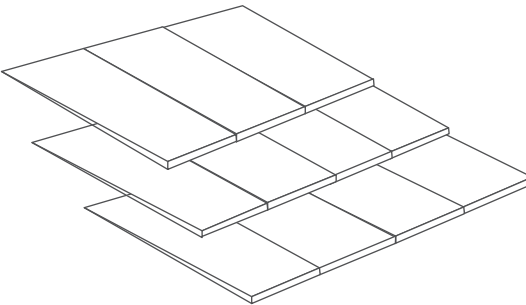

Design and Performance

Sustainable timber — Manufactured from 100% plantation PEFC Certified Western Red Cedar

Durability — Highly durable and manufactured from Western Red Cedar

Application — Suitable for external use




Weatherboard

A classic façade solution with enduring appeal
Suitable for external applications

Profiles



130mm wide (110 cover)
18mm thickness available



180mm wide (160 cover)
18mm thickness available

Timber Species

— Timber species listed on page 46

— Timber coatings listed on page 47



Design and Performance

Sustainable timber — Manufactured from 100% plantation PEFC Certified Western Red Cedar Tight Knot species

Application — Suitable for external use

Installation — Simple cost-effective installation




Timber Species

All timber species are available in set or random lengths. For guidance on species suitability, contact our projects team.


— SOFTWOOD

Western Red Cedar, Alaskan Cedar and Hemlock are the only softwood species suitable for 9mm profiles. All Softwood species can be used for 12mm thickness or greater. For external use, we recommend 18mm thickness or greater.



Western Red Cedar

Plantation
100% PEFC Certified
Greentag Certified




Western Red Cedar - Tight Knot

Plantation
100% PEFC Certified



Hemlock

Plantation
100% PEFC Certified
Suitable for indoor and
out-of weather use only



Hemlock - Thermally Modified

Plantation
100% PEFC Certified



Alaskan Cedar

Plantation
100% PEFC Certified



Accoya

Plantation
100% PEFC Certified


— HARDWOOD

Hardwood species are suitable from 15mm thickness for out-of-weather applications, and from 18mm for fully external use.



Blackbutt

FSC Certification is available



Spotted Gum

FSC Certification is available



Ironbark

FSC Certification is available



French Oak

PEFC Certification is available

Timber Finishes

Our in-house manufacturing capabilities allow for bespoke timber finishes tailored to your project. The finishes shown below represent our standard offering.

Some finishes may not be available across all timber species For guidance on finishes, contact our projects team.



Circular Sawn



Band Sawn




Shot Blasted



Wire Brushed



Two Tone



Charred - Shou Sugi Ban



Dressed

Timber Coatings

We offer a range of standard and custom coating systems designed to protect and enhance our timber products. All coatings are ultra-low VOC or VOC-free to meet environmental and performance standards.

Penetrating Oil Coatings

Used for both internal and external applications, penetrating oils soak into the timber, enhancing UV and weather resistance. These oils are ideal for achieving a natural patina or matte finish. Pre-oiling and onsite finishing are available.



Suitable
for external
conditions

Acid Catalysed Coatings

High-performance coatings ideal for clear finishes in matte or satin. Commonly used on internal joinery or protected cladding, these coatings are hard-wearing and UV-stable.



Suitable for
out-of-weather
use only

UV Catalysed Coatings

UV coatings provide excellent surface protection while being free from solvents and VOCs. Available in matte or satin, this is our most environmentally friendly finish option.



Suitable for
out-of-weather
use only

Custom Coatings

If your design requires a custom colour, we can match to any reference shade using our colour-matching technology.



Suitable for
out-of-weather
use only

Some finishes are available as a combination of UV and Acid Catalysed systems. Contact our team to confirm availability for your chosen species.


Timber Coatings




Clear




Sela Brown



New Bronzestone



Burnt Ash




Walnut




Cedartone



Autumntone



Burnt Red



Merbau



Light Oak



Goldtone



Honeycomb



Rustic Gold



White Wash



Grey Mist



Smokey Grey



Black Ash

Please note the above colours are based on the timber species Western Red Cedar. Colour tones may vary depending on species and it is strongly recommend getting a sample of your required timber species and oil colour approved prior to ordering. For further information about our range of coatings and colours, please contact our projects team hello@modinex.com.au

Profiles & Product Weights

PROFILE	WESTERN RED CEDAR	WESTERN RED CEDAR TIGHT KNOT	HEMLOCK THERMALLY MODIFIED	ALASKAN CEDAR	ACCOYA
BeachClad 120 x 18mm	-	5.71 kg/m2	-	-	-
BeachClad 170 x 18mm	-	5.86 kg/m2	-	-	-
BeachClad 115 x 26mm	-	7.23 kg/m2	-	-	-
BeachClad 81 x 21mm	-	5.91 kg/m2	-	-	-
BeachClad 81 x 26mm	-	7.42 kg/m2	-	-	-
BeachClad 40 x 40mm	-	0.56 kg/lm	-	-	-
Elements Channel Cladding 120 x 20mm	-	-	10.7 kg/m2	-	-
Elements Channel Cladding 40 x 40mm	-	-	0.90 kg/lm	-	-
Shiplap 82 x 12mm	3.79 kg/m2	3.79 kg/m2	4.98 kg/m2	5.36 kg/m2	5.54 kg/m2
Shiplap 82 x 15mm	4.57 kg/m2	4.57 kg/m2	6.01 kg/m2	6.47 kg/m2	6.69 kg/m2
Shiplap 82 x 18mm	5.68 kg/m2	5.68 kg/m2	7.47 kg/m2	8.04 kg/m2	8.31 kg/m2
Shiplap 133 x 15mm	4.61 kg/m2	4.61 kg/m2	6.05 kg/m2	6.51 kg/m2	6.74 kg/m2
Shiplap 133 x 18mm	5.74 kg/m2	5.74 kg/m2	7.54 kg/m2	8.11 kg/m2	8.39 kg/m2
Shiplap 181 x 18mm	5.80 kg/m2	5.80 kg/m2	7.63 kg/m2	8.21 kg/m2	8.49 kg/m2

PROFILE	WESTERN RED CEDAR	WESTERN RED CEDAR TIGHT KNOT	HEMLOCK THERMALLY MODIFIED	ALASKAN CEDAR	ACCOYA
Vee-joint 86 x 12mm	3.94 kg/m2	3.79 kg/m2	4.98 kg/m2	5.36 kg/m2	5.54 kg/m2
Vee-joint 86 x 15mm	4.78 kg/m2	4.57 kg/m2	6.01 kg/m2	6.47 kg/m2	6.69 kg/m2
Vee-joint 86 x 18mm	5.86 kg/m2	5.68 kg/m2	7.47 kg/m2	8.04 kg/m2	8.31 kg/m2
Vee-joint 133 x 15mm	4.61 kg/m2	4.61 kg/m2	6.05 kg/m2	6.51 kg/m2	6.74 kg/m2
Vee-joint 133 x 18mm	5.74 kg/m2	5.74 kg/m2	7.54 kg/m2	8.11 kg/m2	8.39 kg/m2
Vee-joint 181 x 18mm	5.80 kg/m2	5.80 kg/m2	7.63 kg/m2	8.21 kg/m2	8.49 kg/m2
Channel Cladding 86 x 12mm	3.95 kg/m2	3.95 kg/m2	5.19 kg/m2	5.58 kg/m2	5.78 kg/m2
Channel Cladding 70 x 18mm	5.63 kg/m2	5.63 kg/m2	7.40 kg/m2	7.96 kg/m2	8.23 kg/m2
Channel Cladding 120 x 18mm	5.79 kg/m2	5.79 kg/m2	7.61 kg/m2	8.18 kg/m2	8.47 kg/m2
Channel Cladding 170 x 18mm	5.86 kg/m2	5.86 kg/m2	7.70 kg/m2	8.29 kg/m2	8.57 kg/m2
Channel Cladding 115 x 26mm	5.36 kg/m2	5.36 kg/m2	7.05 kg/m2	7.58 kg/m2	7.84 kg/m2
Castelation 81 x 12mm	3.58 kg/m2	3.58 kg/m2	4.70 kg/m2	5.06 kg/m2	5.24 kg/m2
Castelation 81 x 18mm	5.30 kg/m2	5.91 kg/m2	6.97 kg/m2	7.50 kg/m2	7.76 kg/m2
Castelation 81 x 21mm	5.91 kg/m2	5.91 kg/m2	7.77 kg/m2	8.36 kg/m2	8.64 kg/m2

PROFILE	WESTERN RED CEDAR	WESTERN RED CEDAR TIGHT KNOT	HEMLOCK THERMALLY MODIFIED	ALASKAN CEDAR	ACCOYA
Castelation 81 x 26mm	5.91 kg/m2	7.42 kg/m2	9.75 kg/m2	10.50 kg/m2	10.86 kg/m2
Screenclad 81 x 12mm	3.70 kg/m2	3.70 kg/m2	4.86 kg/m2	5.23 kg/m2	5.41 kg/m2
Screenclad 81x 18mm	5.55 kg/m2	5.55 kg/m2	7.29 kg/m2	7.85 kg/m2	8.12 kg/m2
Screenclad 81 x 21mm	6.27 kg/m2	6.27 kg/m2	8.24 kg/m2	8.86 kg/m2	9.17 kg/m2
Screenclad 81 x 26mm	7.91 kg/m2	7.91 kg/m2	10.40 kg/m2	11.19 kg/m2	11.57 kg/m2
Screenclad 120 x 21mm	6.36 kg/m2	6.36 kg/m2	8.36 kg/m2	9.00 kg/m2	9.31 kg/m2
Stepped Expression Step 27x39mm	0.36 kg/lm	0.36 kg/lm	0.48 kg/lm	0.51 kg/lm	0.53 kg/lm
Stepped Expression Flat 27x17mm	0.15 kg/lm	0.15 kg/lm	0.20 kg/lm	0.21 kg/lm	0.22 kg/lm
Stepped Expression Flat 54x17mm	0.31 kg/lm	0.31 kg/lm	0.40 kg/lm	0.43 kg/lm	0.45 kg/lm
Stepped Expression Flat 81x17mm	0.48 kg/lm	0.48 kg/lm	0.63 kg/lm	0.68 kg/lm	0.71 kg/lm
Stepped Expression Flat 135x17mm	0.77 kg/lm	0.77 kg/lm	1.02 kg/lm	1.10 kg/lm	1.13 kg/lm
Stepped Expression Flat 162x17mm	0.93 kg/lm	0.93 kg/lm	1.22 kg/lm	1.32 kg/lm	1.36 kg/lm
Stepped Expression 80x26mm	6.30 kg/m2	6.30 kg/m2	8.28 kg/m2	8.91 kg/m2	9.22 kg/m2
Batten 40x40mm	0.56 kg/lm	0.56 kg/lm	0.74 kg/lm	0.79 kg/lm	0.82 kg/lm


PROFILE	WESTERN RED CEDAR	WESTERN RED CEDAR TIGHT KNOT	HEMLOCK THERMALLY MODIFIED	ALASKAN CEDAR	ACCOYA
Diamond Clad Single 81 x 26mm	7.57 kg/m2	7.57 kg/m2	9.95 kg/m2	10.71 kg/m2	11.08 kg/m2
Diamond Clad Double 81 x 26mm	7.57 kg/m2	7.57 kg/m2	9.95 kg/m2	10.70 kg/m2	11.07 kg/m2
Diamond Clad 81 x 26mm	7.24 kg/m2	7.24 kg/m2	9.52 kg/m2	10.25 kg/m2	11.60 kg/m2
Chamfered Clad 81 x 26mm	7.19 kg/m2	7.19 kg/m2	9.45 kg/m2	10.17 kg/m2	11.52 kg/m2
Double Round 81 x 26mm	7.28 kg/m2	7.28 kg/m2	9.57 kg/m2	10.29 kg/m2	10.65 kg/m2
Half Dowel 81 x 26mm	7.85 kg/m2	7.85 kg/m2	10.32 kg/m2	11.11 kg/m2	11.49 kg/m2
Fluted 81 x 26mm	6.71 kg/m2	6.71 kg/m2	8.82 kg/m2	9.49 kg/m2	9.81 kg/m2
Concave Clad 81 x 26mm	6.43 kg/m2	6.43 kg/m2	8.45 kg/m2	9.09 kg/m2	9.40 kg/m2
Single Rib Concave 81 x 26mm	6.67 kg/m2	6.67 kg/m2	8.77 kg/m2	9.44 kg/m2	9.76 kg/m2
Single Rib Convex 81 x 26mm	7.62 kg/m2	7.62 kg/m2	10.02 kg/m2	10.78 kg/m2	11.15 kg/m2
Single Rib 81 x 26mm	7.35 kg/m2	7.35 kg/m2	9.66 kg/m2	10.39 kg/m2	10.75 kg/m2
Ribclad 81 x 26mm	7.33 kg/m2	7.33 kg/m2	9.63 kg/m2	10.36 kg/m2	10.72 kg/m2
Hex Clad Single 81 x 26mm	7.19 kg/m2	7.19 kg/m2	9.45 kg/m2	10.17 kg/m2	10.52 kg/m2
Hex Clad Double 81 x 21mm	6.00 kg/m2	6.00 kg/m2	7.89 kg/m2	8.49 kg/m2	8.78 kg/m2

PROFILE	WESTERN RED CEDAR	WESTERN RED CEDAR TIGHT KNOT	HEMLOCK THERMALLY MODIFIED	ALASKAN CEDAR	ACCOYA
Hex Clad Double 81 x 26mm	7.75 kg/m2	7.75 kg/m2	10.19 kg/m2	10.97 kg/m2	11.34 kg/m2
Hex Clad Triple 81 x 21mm	6.44 kg/m2	6.44 kg/m2	8.46 kg/m2	9.10 kg/m2	9.42 kg/m2
Hex Clad Triple 81 x 26mm	8.19 kg/m2	8.19 kg/m2	10.76 kg/m2	11.58 kg/m2	11.98 kg/m2
Batten 30 x 30mm	0.32 kg/lm	0.32 kg/lm	0.41 kg/lm	0.45 kg/lm	0.46 kg/lm
Batten 30 x 40mm	0.42 kg/lm	0.42 kg/lm	0.55 kg/lm	0.59 kg/lm	0.61 kg/lm
Batten 40 x 18mm	0.25 kg/lm	0.25 kg/lm	0.33 kg/lm	0.36 kg/lm	0.37 kg/lm
Batten 40 x 40mm	0.56 kg/lm	0.56 kg/lm	0.74 kg/lm	0.79 kg/lm	0.82 kg/lm

Viroc Wall Panelling

Concrete-look architectural wall cladding
Suitable for external and out-of-weather applications.

Size

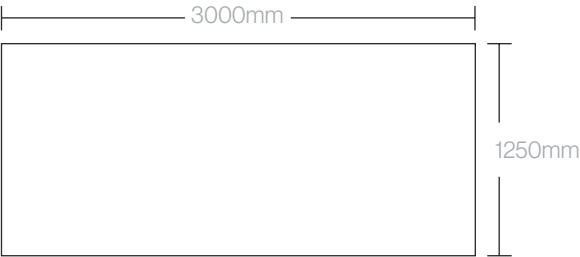

Design and Performance

- Sheet size – 3000mm x 1250mm
- Design – Manufactured from Portland Cement to achieve a natural concrete appearance
- Sustainability – Silica-free and made using 100% recycled plantation PEFC Certified timber
- Application – Suitable for internal and external wall use
- Thickness – Available in 12mm and 19mm
- Sealer – Required for splashbacks and recommended externally to protect against staining
- Fire rating – Group 1 internally and BAL29 externally
- Colours – Custom indoor colours available on request

PROFILE	WEIGHT
3000 x 1250 x 12mm thick	16.20 kg/m2


Colours



Viroc Flooring

Durable concrete-look flooring sheets
Suitable for internal applications only.

Size

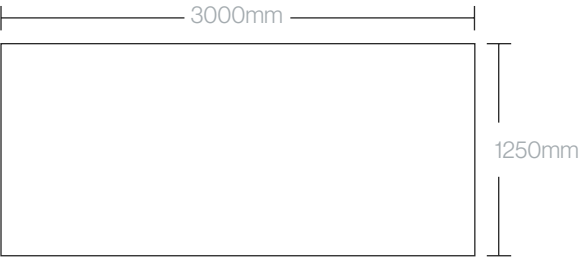

Design and Performance

- Sheet size – 3000mm x 1250mm
- Design – Manufactured from Portland Cement to achieve a natural concrete appearance
- Sustainability – Silica-free and made using 100% recycled plantation PEFC Certified timber
- Application – Suitable for internal and external wall use
- Thickness – Available in 12mm and 19mm
- Sealer – Required for splashbacks and recommended externally to protect against staining
- Fire rating – Group 1 internally and BAL29 externally
- Colours – Custom indoor colours available on request

Colours







French Oak Flooring

Engineered timber flooring
Suitable for internal applications only.


Profiles




Plank 220mm wide
15mm & 21mm thickness available



Herringbone 120mm wide
15mm thickness available



Chevron *Special order
15mm thickness available



Wear Layer
Our 15mm profiles include a 4mm wear layer, while 21mm profiles feature a 6mm wear layer.

- In 15mm thickness, the colours Fossil Grey (240mm x 1900mm) and Mink (220mm x 1900mm) are available
- Other sizes are available on request


Coating

Manufactured with 8 coats of Treffert Sapphire Matte for high-performance wear resistance. This water-based, two-component coating is non-toxic and ideal for surfaces requiring long-term durability.


- Non-toxic
- Water-based polyurethane
- High scratch resistance

Grading

All finishes are supplied in Classic Grade as standard. For a cleaner appearance with fewer knots and features, Signature Grade is available to order with a 12-week lead time.



Signature



Classic



Colours



French Oak Raw



Sand Oak



Almond



Dusk



Moonshine



Golden Haze



Desert Sand



Frosted Oak



Woodland



Burnished Ash



Dark Moonstone




Mocha



Burnt Umber




Wharf Grey



Fossil Grey



Mink




Midnight


Australian Hardwood Flooring

Engineered Australian timber flooring
Suitable for internal applications only.


Profiles



Plank 136mm & 180mm wide
13.5mm thickness available



Herringbone 136mm wide
13.5mm thickness available
*Only available in signature grade



Wear Layer
13.5mm profiles have a 3.5mm wear layer.

Coating

Manufactured with 8 coats of Bona Traffic Ultra Matte for premium durability and a natural aesthetic. This water-based, two-part polyurethane system is designed for high-use environments.

- 25-year structural warranty
- Non-Toxic
- Two part water based poly coating
- Excellent wear resistance

Finishes



Blackbutt Signature



Blackbutt Organic



Spotted Gum Signature



Spotted Gum Organic




Stair Nosings

Custom stair nosing and enclosed treads
Designed to complement our timber flooring collections.


Profiles

Our stair nosing range is available across the Australian Hardwood and French Oak collections. A P3 slip rating can be achieved using Perspex or metal anti-slip inserts on selected profiles (Stair Nosing 07 and 09).


Insert strip colours include light grey, walnut, black, mid grey, white, alloy and brass.




Stair Nosing 01




Stair Nosing 03




Stair Nosing 05



Stair Nosing 07



Stair Nosing 09

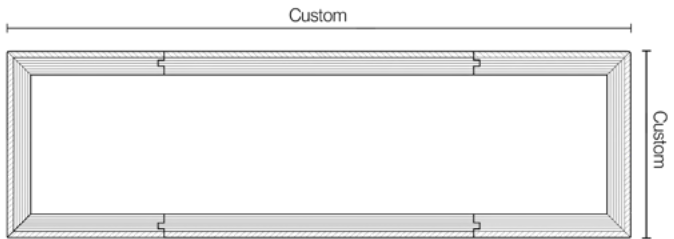

Enclosed Tread 01



Millboard Decking

Decking that is crafted from a unique blend of natural minerals and polymer resin, delivering exceptional stability, durability and is low maintenance.

Profiles



Fascia 146mm wide (3.2 metre)
18mm thickness available



Bullnose 50mm wide (3.2 metre)
33mm thickness available



Decking 176mm wide (3.6 metre)
32mm thickness available




Decking 200mm wide (3.6 metre)
32mm thickness available

Colours


— Enhanced Grain




Antique Oak




Burnt Cedar




Coppered Oak




Golden Oak




Jarrah



Limed Oak



Smoked Oak



Brushed Basalt

Features and Benefits

- Fire rating — BAL19 fire rating
- Compliance — P5 slip rating
- Durability — 25-year structural & 15-year fading warranty



Tractio Decking

Decking with a polypropylene and calcium carbonate core, engineered for strength, slip resistance and lasting performance.


Profiles




Solid 140mm wide
22mm thickness available



Solid 184mm wide
22mm thickness available



Slotted 140mm wide
22mm thickness available




Slotted 184mm wide
22mm thickness available

Colours




Alpine Grey



Charred



Desert Sand



Forest Brown



Weathered







From concept to completion, we're here to support your project.

Contact P—1800 156 455 E—hello@modinex.com.au

Explore inspiration, case studies, and product downloads online.

modinex.com.au